



HOLSTER

Step 1

Attach Six Shooter to Holster using the strap as shown.

Pull around fuel bottle.

Strap goes between the two bottle supports.

Pull around fuel bottle to feed through the metal loop

Strap goes through both mounting ears.

This tab fits into this slot.


Velcro on this side.

Step 2

Make a copy of this template, cut it out, and position it on the top of your fuel cap. Drill the three holes shown.

Drill these two holes using a 1/4" drill bit.

Drill this hole using a 1/16" drill bit.

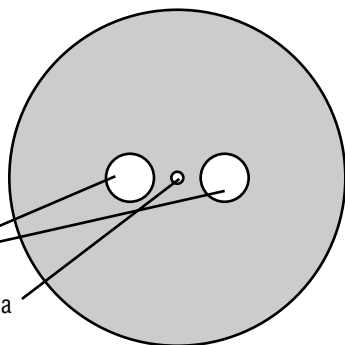

Step 3

Lay the fuel tubing (approximately 2½ feet long) in a straight line. Using a pair of scissors or a hobby knife, cut the tubing into the following four lengths.

- 2 pieces - 1" long each
- 1 piece - 11" long
- 1 piece - remainder of tubing


continues on back

continued from front

Step 4

Attach the cap fitting to your cap using the supplied screw.
DO NOT OVERTIGHTEN!

Assemble the tubing as shown:

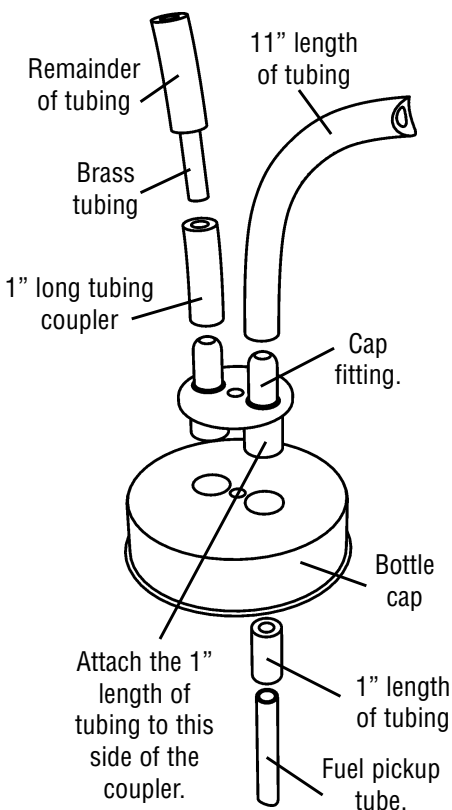

Step 5

Screw the cap onto your fuel bottle. Attach the two fuel lines to the fuel nipples of the Six Shooter. It makes no difference as to which line goes on which nipple, since the Six Shooter will pump in either direction.

Refer to the drawing on the front of the Holster box.

DAVE BROWN PRODUCTS INC.

4560 Layhigh Road • Hamilton, Ohio 45013 • 513-738-1576
www.dbproducts.com